


Screenshots: looking at my Mail2Web problem: Home page is below. ~~Note that I was using the "what do you thay" comment thread to try to get mail2web to function.~~ Later, I was, appropriately using forums in the Lit Forum to test mail2web. New posts would wind up creating the emails with "reply above this line," but unfortunately replying didn't cause anything to happen at all -- nothing winds up being posted back into the portal...

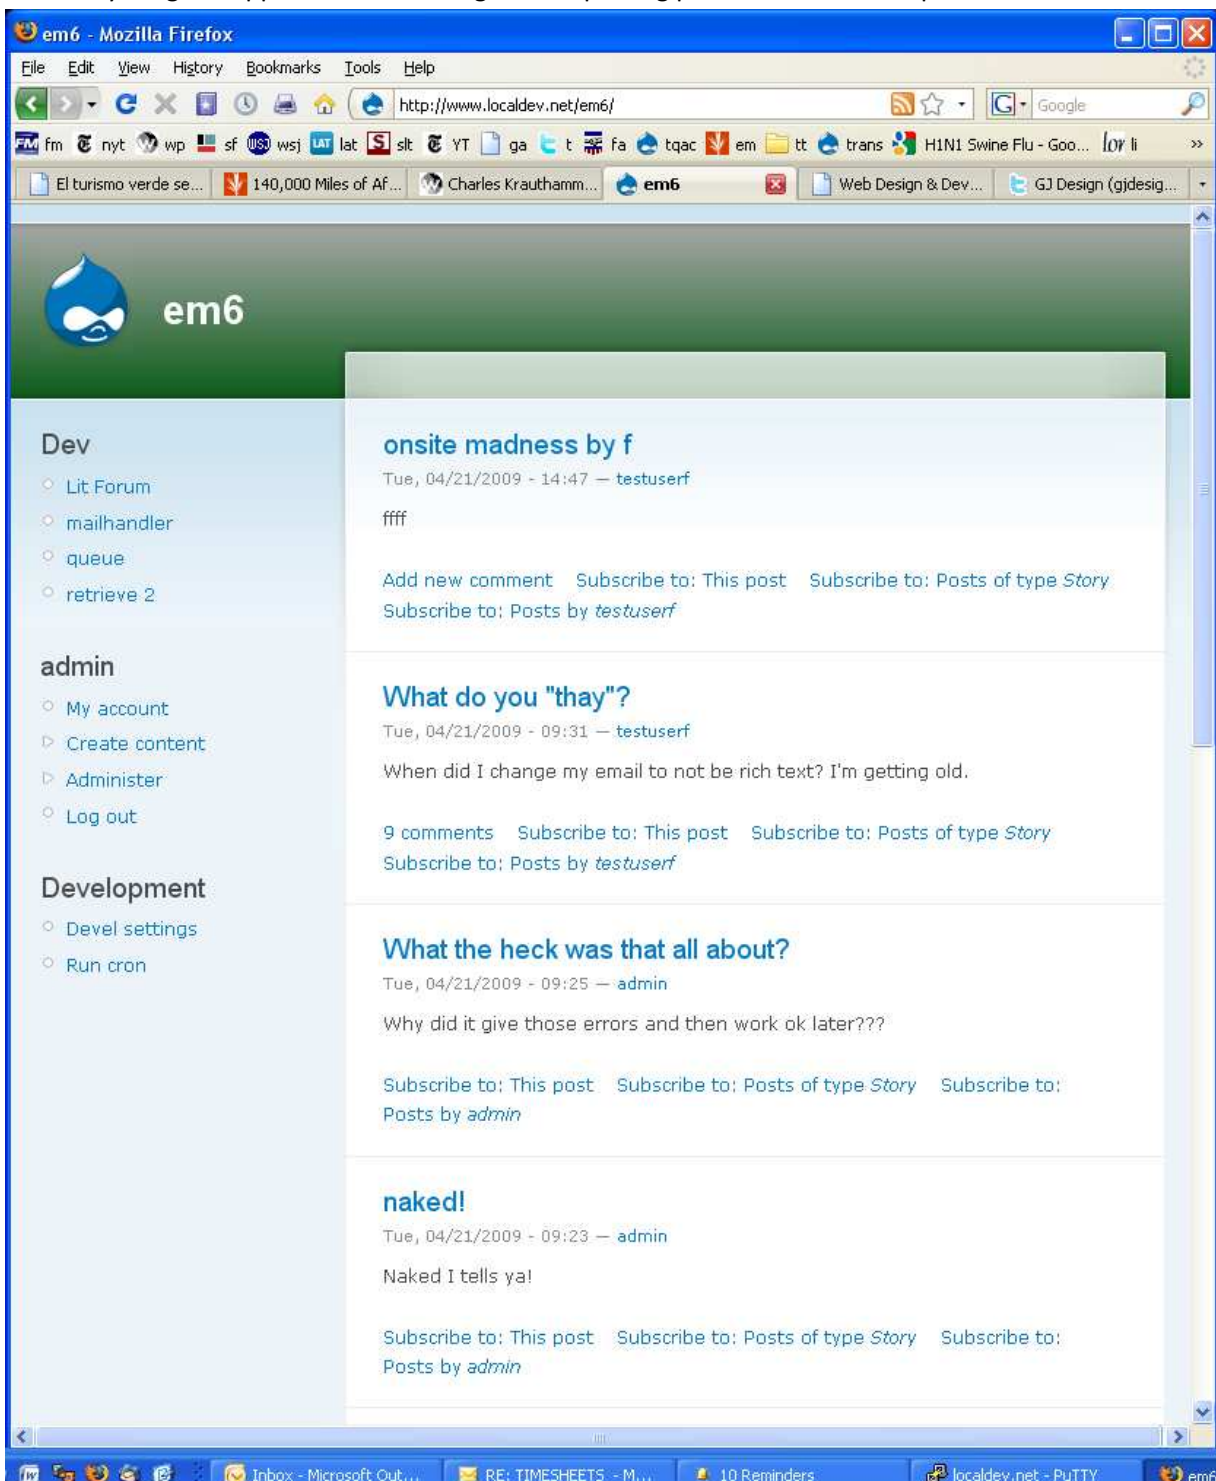

Below is the Forum where I was trying to get it to work with mail2web functionality. I have users subscribed to content of type "forum topic" etc... You can see that I have subscribed users to not only this "post" but also posts of type forum topic. Still no replies to the emails make it onto the forum, just ones posted on the website.

 **em6**

[Home](#) > [Forums](#) > [Literature Forum](#)

This is the forum of the admin

[View](#) [Edit](#)

Mon, 04/27/2009 - 14:03 — [admin](#)

We will discuss all about being orderly and productive.

[This is the forum of Mr F >](#)

[Add new comment](#) [Unsubscribe from: This post](#) [Literature Forum](#)
[Unsubscribe from: Posts of type *Forum topic*](#) [Subscribe to: Posts by *admin*](#)

test from webbbbbbbb

Fri, 05/01/2009 - 07:57 — [admin](#)

bbbbbbb

[delete](#) [edit](#) [reply](#)

IM THE FMAN

Fri, 05/01/2009 - 07:59 — [testuserf](#)

FFFF from web

[delete](#) [edit](#) [reply](#)

Dev

- [Lit Forum](#)
- [mailhandler](#)
- [queue](#)
- [retrieve 2](#)

admin

- [My account](#)
- [Create content](#)
- [Administer](#)
- [Log out](#)

Development

- [Devel settings](#)
- [Run cron](#)

Below is the mailhandler. ONLY THE MIDDLE BOX, em5s@localdev.net, actually works, and before I continued installing the mail2web stuff, I was successfully posting stories to the site by emailing that email address.

The screenshot shows the Mailhandler admin interface in Mozilla Firefox. The browser's address bar displays the URL `http://www.localdev.net/em6?q=admin/content/mailhandler`. The page features a green header with the 'em6' logo and a breadcrumb trail: `Home > Administer > Content management`.

On the left, a sidebar menu is organized into two sections: 'Dev' and 'admin'. The 'Dev' section includes links for 'Lit Forum', 'mailhandler', 'queue', and 'retrieve 2'. The 'admin' section includes links for 'My account', 'Create content', 'Administer' (with a sub-menu for 'Content management' containing 'Comments', 'Content', 'Content types', 'Forums', 'Mailhandler', 'Post settings', 'RSS publishing', and 'Taxonomy'), 'Site building', 'Site configuration', 'Messaging & Notifications', 'User management', 'Reports', 'Help', and 'Log out'.

The main content area is titled 'Mailhandler' and includes a 'List' button and an 'Add mailbox' link. Below this, a text block explains the mailhandler module's functionality. At the bottom of the main area, a table lists the configured mailboxes.

Mailhandler [List](#) [Add mailbox](#)

The mailhandler module allows registered users to create or edit nodes and comments via email. Authentication is usually based on the From: email address. There is also an email filter that can be used to prettify incoming email. Users may post taxonomy terms, teasers, and other node parameters using the Command capability. [\[more help...\]](#)

Mailbox	Folder	Operations
em5@localdev.net	INBOX	Retrieve Edit Clone Delete
em5s@localdev.net	INBOX	Retrieve Edit Clone Delete
estephan500em5s@gmail.com	INBOX	Retrieve Edit Clone Delete

Below are the "edit" settings for that one middle mailbox, the one that seems to work:



em6

[Home](#) > [Administer](#) > [Content management](#) > [Mailhandler](#)

Dev

- [Lit Forum](#)
- [mailhandler](#)
- [queue](#)
- [retrieve 2](#)

admin

- [My account](#)
- [Create content](#)
- [Administer](#)
 - [Content management](#)
 - [Comments](#)
 - [Content](#)
 - [Content types](#)
 - [Forums](#)
 - [Mailhandler](#)
 - [Post settings](#)
 - [RSS publishing](#)
 - [Taxonomy](#)
 - [Site building](#)
 - [Site configuration](#)
 - [Messaging & Notifications](#)
 - [User management](#)
 - [Reports](#)
 - [Help](#)
- [Log out](#)

Development

- [Devel settings](#)
- [Run cron](#)

Edit mailbox

Edit the mailbox whose mail you wish to import into Drupal. Can be IMAP, POP3, or local folder.

[\[more help...\]](#)

E-mail address: *

The e-mail address to which users should send their submissions.

Second E-mail address:

Optional. The e-mail address to which modules should send generated content.

Folder:

Optional. The folder where the mail is stored. If you want this mailbox to read from a local folder, give the full path. Leave domain, port, name, and pass empty below. Remember to set the folder to readable and writable by the webserver.

POP3 or IMAP Mailbox:

If you wish to retrieve mail from a POP3 or IMAP mailbox instead of a Folder, select POP3 or IMAP. Also, complete the Mailbox items below.

Mailbox domain:

The domain of the server used to collect mail.

Mailbox port:

The port of the mailbox used to collect mail (usually 110 for POP3, 143 for IMAP).

Mailbox username:

This username is used while logging into this mailbox during mail retrieval.

Mailbox password:

The password corresponding to the username above. Consider using a non-vital password, since this field is stored without encryption in the database.

Extra commands:

Optional. In some circumstances you need to issue extra commands to connect to your mail server (e.g. "/novalidate-cert" etc.). See documentation for [imap_open](#). Begin the string with a "/", separating each subsequent command with another "/".

Mime preference:

When a user sends an e-mail containing both HTML and plain text parts, use this part as the node body.

Security:

☒ Disabled☐ Require password

Disable security if your site does not require a password in the Commands section of incoming e-mails. Note: Security=Enabled and Mime preference=HTML is an unsupported combination.

Send error replies:

☐ Disabled☒ Enabled

Send helpful replies to all unsuccessful e-mail submissions. Consider disabling when a listserv posts to this mailbox.

From header:

Use this e-mail header to determine the author of the resulting node. Admins usually leave this field blank (thus using the **From** header), but **Sender** is also useful when working with listservs.

Default commands:

A set of commands which are added to each message. One command per line. See [Commands](#).

Signature separator:

All text after this string will be discarded. A typical value is "--" that is two dashes followed by a blank in an otherwise empty line. Leave blank to include signature text in nodes.

☒ Delete messages after they are processed?

Uncheck this box to leave read messages in the mailbox. They will not be processed again unless they become marked as unread.

Cron processing:

☐ Disabled☒ Enabled

Select disable to temporarily stop cron processing for this mailbox.

— [Input format](#)

[Cancel](#)

Below are the notifications settings. In the other tabs, ALL check boxes are checked, and the intervals were left as default.

 **em6**

Home > Administer > Messaging & Notifications

Dev

- Lit Forum
- mailhandler
- queue
- retrieve 2

admin

- My account
- ▷ Create content
- ▼ Administer
 - ▷ Content management
 - ▷ Site building
 - ▷ Site configuration
 - ▼ Messaging & Notifications
 - Mail to web
 - Message templates
 - Messaging settings
 - Notifications Settings
 - Subscriptions
 - ▷ User management
 - ▷ Reports
 - Help
- Log out

Development

- Devel settings
- Run cron

Notifications Settings

GeneralContent SubscriptionsEventsIntervalsUser Interface

General settings

☒ **Notify poster of own posts**
Notifies a node poster about their own posts. Useful principally during testing. Default is OFF.

☐ **Immediate sending**
Notifications are usually queued to be sent on cron process later. Checking this option will cause immediate notifications to be sent right away, instead of being queued. This will produce more timely notifications for sites with a small number of users. Not recommended for sites with a large number of users.

Notifications Sender:

- ☒ No one (All notifications will appear as coming from the web site)
- ☐ User name, site data (Only the user name will be used)
- ☐ Full user data (User name and available user information)

Use the site information as the sender for notification messages or use account data from the user causing the event. **WARNING:** Selecting the last option (Full user data) may disclose private information to subscribers like the user e-mail address.

Logging:

Disabled ▾

If enabled all notifications will be logged and kept for the specified time after they're processed.

Default settings

Default send interval:

Immediately ▾

▷ Limits for queue processing

Save configuration

Reset to defaults

Below are messaging settings:

 **em6**

[Home](#) > [Administer](#) > [Messaging & Notifications](#)

Dev

- [Lit Forum](#)
- [mailhandler](#)
- [queue](#)
- [retrieve 2](#)

admin

- [My account](#)
- ▷ [Create content](#)
- ▽ [Administer](#)
 - ▷ [Content management](#)
 - ▷ [Site building](#)
 - ▷ [Site configuration](#)
 - ▽ [Messaging & Notifications](#)
 - [Mail to web](#)
 - [Message templates](#)
 - [Messaging settings](#)
 - [Notifications Settings](#)
 - [Subscriptions](#)
 - ▷ [User management](#)
 - ▷ [Reports](#)
 - [Help](#)
- [Log out](#)

Development

- [Devel settings](#)
- [Run cron](#)

Messaging settings

General settings

Default send method:
☒ Mail

Logging:
 
If enabled all messages will be logged and kept for the specified time after they're sent.

▽ [Settings for messaging methods](#)

Depending on your content format and the tokens you are using for messages it is important that you use the right filtering for the message body. Set up the filters you need using the [Input Formats](#) page.

Drupal mail settings

Name:

Name for display.

Message body filter:
 

▷ [Limits for queue processing](#)

Below are the mail2web settings -- NOTE: I'M UNCLEAR WHAT TO PUT INTO "SERVER STRING FOR MESSAGE ID"

 **em6**

Home > Administer > Messaging & Notifications

Dev

- Lit Forum
- mailhandler
- queue
- retrieve 2

admin

- My account
- ▷ Create content
- ▽ Administer
 - ▷ Content management
 - ▷ Site building
 - ▷ Site configuration
 - ▽ Messaging & Notifications
 - Mail to web
 - Message templates
 - Messaging settings
 - Notifications Settings
 - Subscriptions
 - ▷ User management
 - ▷ Reports
 - Help
- Log out

Development

- Devel settings
- Run cron

Mail to web

Mailhandler Inbox: *

em5@localdev.net

E-mail account to be used for incoming e-mail. It needs to be set up using Mailhandler. It will be set as Reply-To for outgoing e-mail notifications.

Expiration time: *

Never

Time after which the signature of outgoing e-mails expires and responses won't be accepted anymore.

Reply text:

(((Reply ABOVE this LINE to POST a COMMENT)))

Text to separate reply from the rest of the e-mail. Leave blank for not using this feature.

☒ Bounce rejected emails

If this box is checked, a reply will be sent for wrong emails with some information about the cause of rejection.

Server string for Message Id:

localdev.net

Server name to be used in Message Id's. It will be included in outgoing emails and checked on responses.

Enable message cleaner:

☒ Off

☐ On

Attempt to remove email client gunk at bottom of emails; like "On Jan 26, 2009, John Doe wrote: "? If parts of emails are getting stripped out or appearing empty, turn this off.

Save configuration Reset to defaults